

Product Features

1. High precision and high frequency stability
2. Excellent thermal coupling between thermistor and crystal
3. Application in mobile communication
4. RoHS and REACH Compliant , Pb-free , Halogen-free
5. Industry Standard Package :
1.65*1.25*0.65 mm (OW Series)

Application :

- Smart phone
- Modem
- GPS



Test condition

Ambient temperature : $25 \pm 5^{\circ}\text{C}$


Relative humidity : 40% ~ 70%

● Table 1 . Electrical Specifications

Parameters	Symbol	Min.	Typ.	Max.	Units	Notes
Nominal Frequency	F	26 , 38.4 , 52 , 76.8			MHz	
Frequency Tolerance @ $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$	FT	± 10			ppm	26 , 38.4 , 52MHz
		± 16				76.8MHz
Frequency Stability Over Operating Temp. Range (Reference 25°C)	ST	± 12			ppm	@ $-30 \sim 85^{\circ}\text{C}$
Operating Temperature	Topr	-30	25	85	$^{\circ}\text{C}$	
Load Capacitance	CL	7 , 8 or specify			pF	
Drive Level	DL	-	100	250	uW	
Equivalent Series Resistance	ESR	-	-	50	Ohm	26 、 38.4MHz
		-	-	30		52 、 76.8MHz
Aging	-	± 0.7			ppm	1st Year
Thermistor Resistance (25°C)	-	$100\text{k} \pm 1\%$			Ohm	
B-Constant ($25-50^{\circ}\text{C}$)	-	$4250 \pm 1\%$			K	The B constant is calculated using the zero-power resistance values measured at 25°C and 50°C

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

■ DIMENSIONS (Unit : mm)

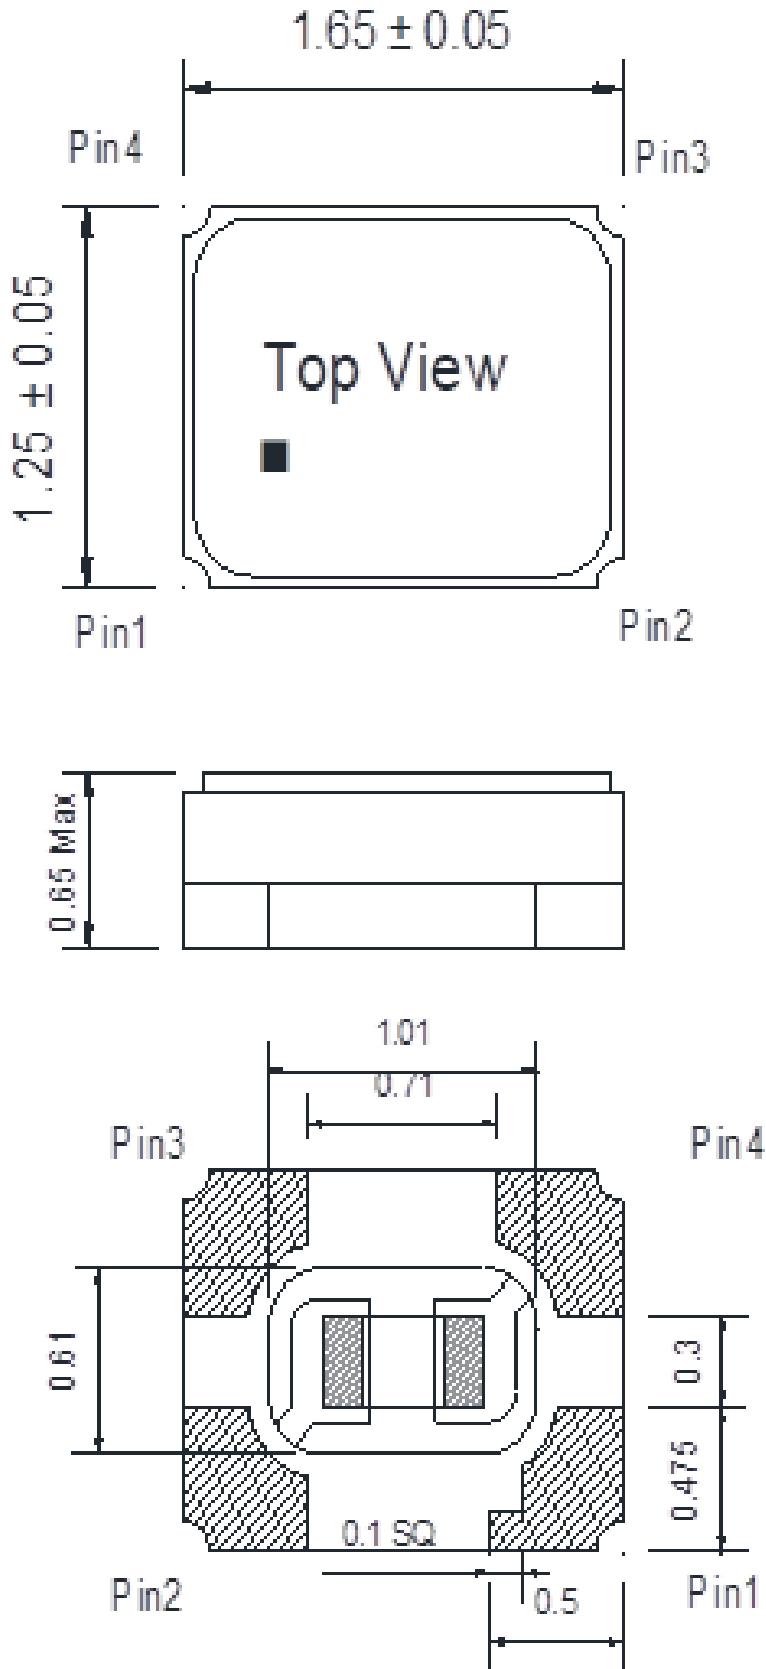


■ PIN FUNCTION

	Symbol	Function
Pin 1	XT1	XTAL Terminal 1
Pin 2	RT2	Thermistor Terminal 2
Pin 3	XT2	XTAL Terminal 2
Pin 4	RT1	Thermistor Terminal 1

Note:


Pin 2 is connected to the metal lid and thermistor
Pin 4 is connected to the thermistor only

■ BLOCK DIAGRAM

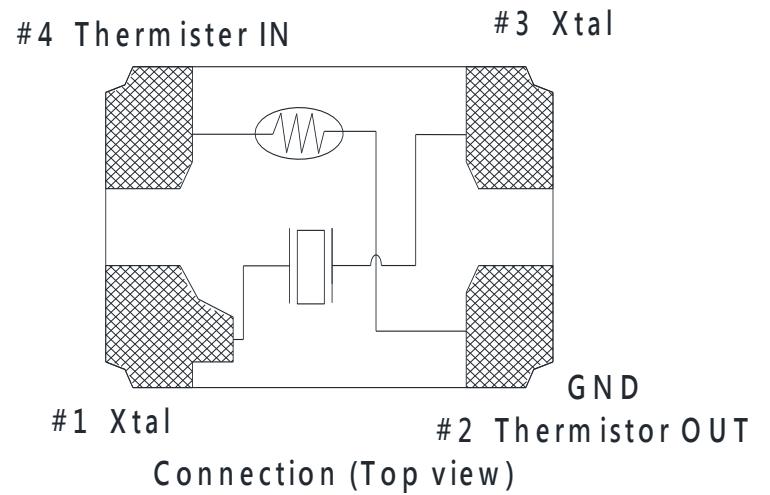

Note: RT2 shall be connected to GND is recommended

■ SUGGESTED LAYOUT

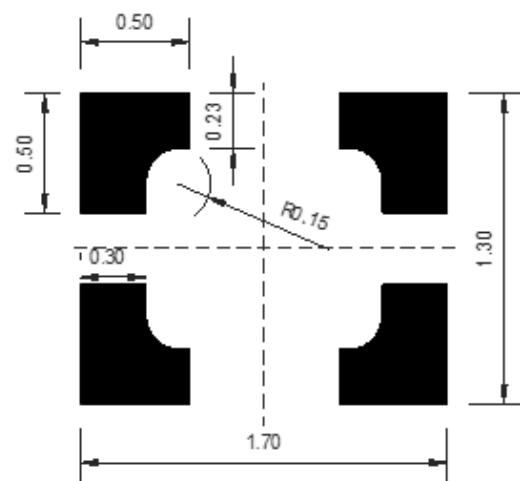

(Unit : mm)